

# JELLING MUSIKFESTIVAL 2024 – MAIN STAGE



Video Specifications



# JELLING MUSIKFESTIVAL 2024 – MAIN STAGE

## Light Specifications

### Fixtures:

- 24 Pcs. Martin MAC Viper XIP
- 24 Pcs. Martin MAC Aura XB
- 12 Pcs. Chauvet Color Strike M
- 32 Pcs. Roxx Cluster B2FC
- 24 Pcs. Par 64 W.CP61 Bulb 1000w

### Followpot:

- 3 Pcs. Robe RoboSpot followspot wih 2 x Robe BMFL LT pr. handle

### SMOKE:

- 02 Pcs. Smoke rack with.  
1 X Looke Viper 2.6 + 1 X Fan

### Guest truss:

- 02 Pcs. Guest Side LX
- 03 Pcs. Guest LX

### Control:

- 01 Pcs. MA Lightning Grandma2 Lite
- 01 Pcs. MA NPU
- 06 Pcs. Guest DMX Lines FOH – Stage
- 02 Pcs. Guest VLAN FOH – Stage

## Video Specifications

### Video

- 02 Pcs. Imag 3X7m
- 01 Pcs. Led infrastructure.
- 01 Pcs. Video Controller
- 01 Pcs. 12GSDI on stage for guest to Broadcast Car
- 01 Pcs. 12GSDI on stage for guest to Videocontroller
- 01 Pcs. 4KHDMI on stage for guest to Videocontroller

### Jelling Contact:

Production Manager: Morten Færk

Mail:

[productionmanager@jellingmusikfestival.dk](mailto:productionmanager@jellingmusikfestival.dk)

Phone: +4522366550

Stage Manager: Jørgen Hoffmann

Mail: [hoffmann2707@hotmail.com](mailto:hoffmann2707@hotmail.com)

Phone: +4553636888

### Nordic Rental Contact:


Production Manager: Anders Linnet


Mail: [Anli@nordic.dk](mailto:Anli@nordic.dk)

Phone: +4527102639



# Light system overview

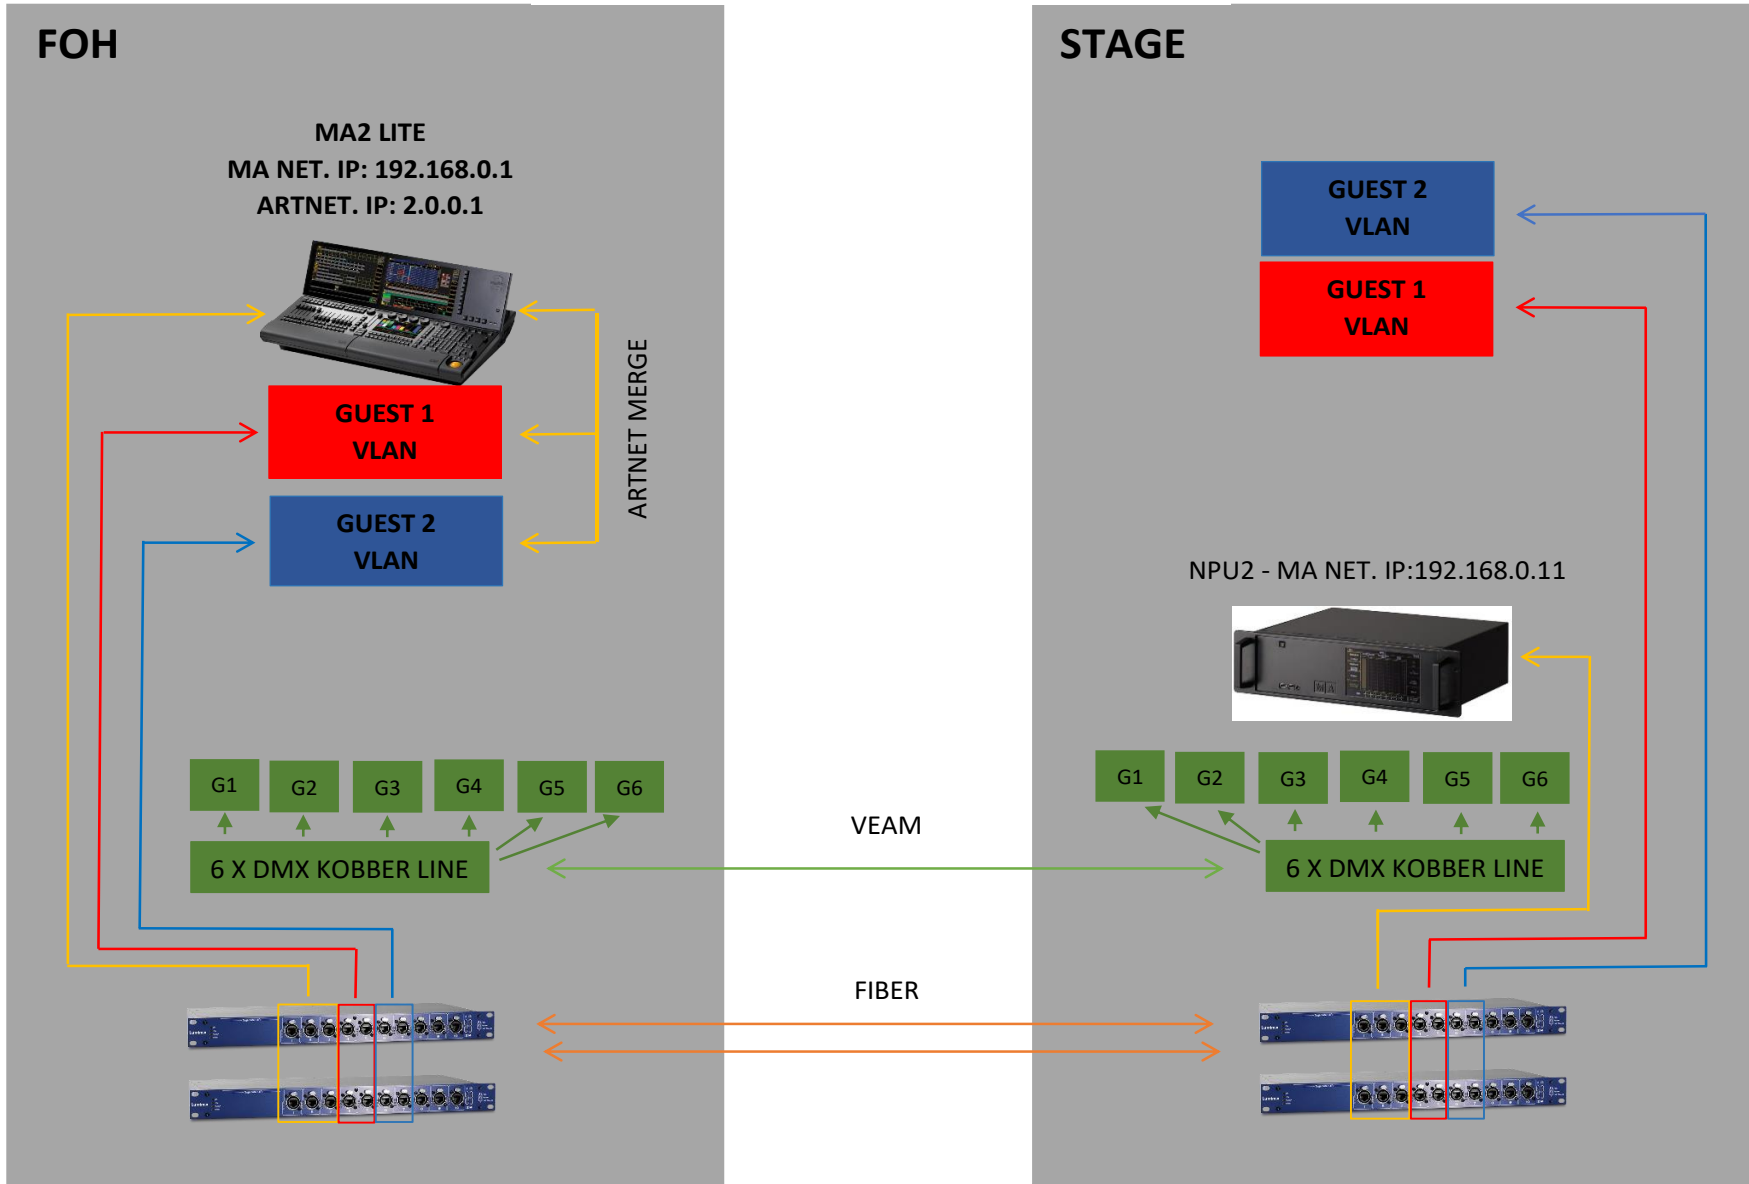

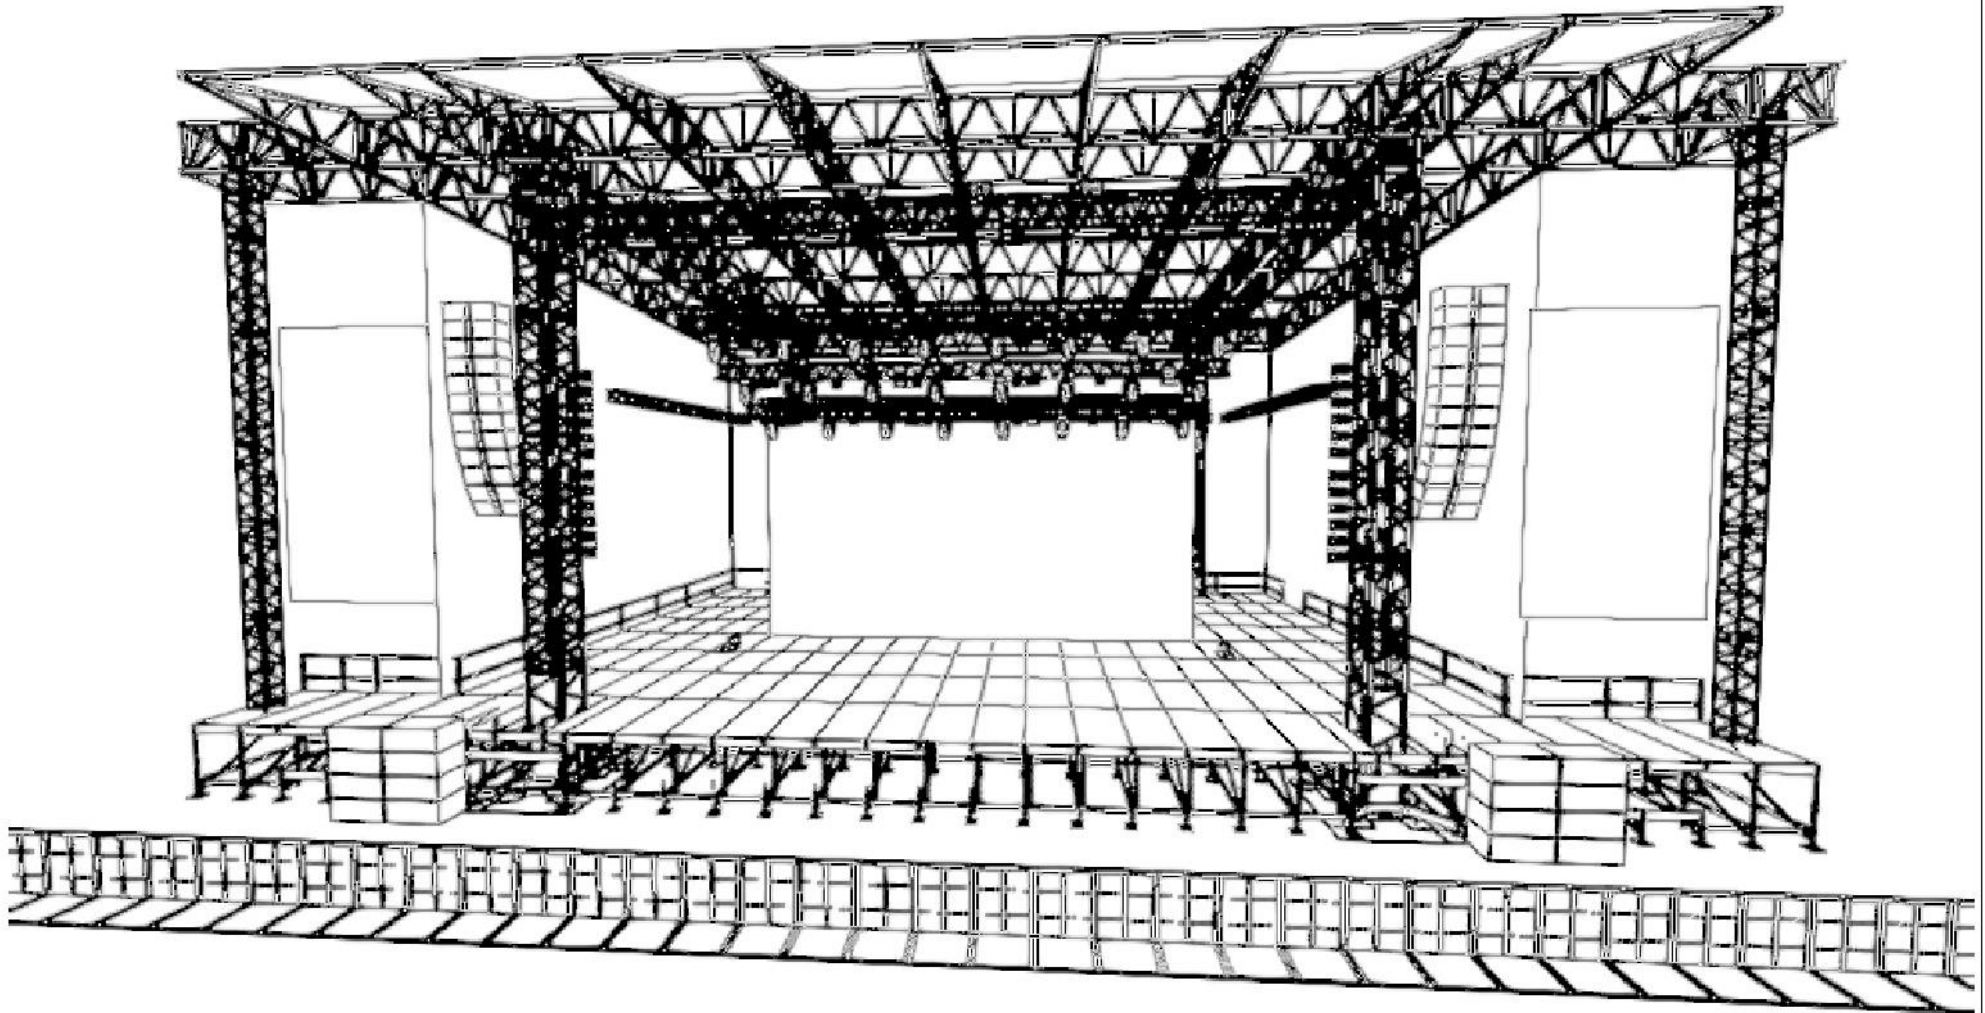

LEGEND

Symbol	Name	Count	Fixture Options
	MAC Aura XB	24	Mode: Std.
	MAC Viper XP	24	Mode: Basic
	Color Strike M	18	Mode: 24 oh
	Cluster B2FO	32	Mode: 8 oh

Symbol	Name	Count	Fixture Options
	PAR 64	24	1 oh
	LOOKVIPER FAN	2	1 oh
	Viper NT	2	1 oh

NOTES

HOUSE DESK:  
GMA2 LITE  
3 PCS GUEST TRUSS (RED)  
2 PCS GUEST TRUSS (BLUE)

VENUE

**JELLING**  
MANAGER - CONTACT  
Anders Linnet  
+4527102639  
anli@nordic.dk

DATE

MAY 2024

SCALE

NTS

VERSION

V 1.2

PROJECT


MAIN STAGE

*Jelling  
Mascifestival*

DESIGN

Nordic Rentals



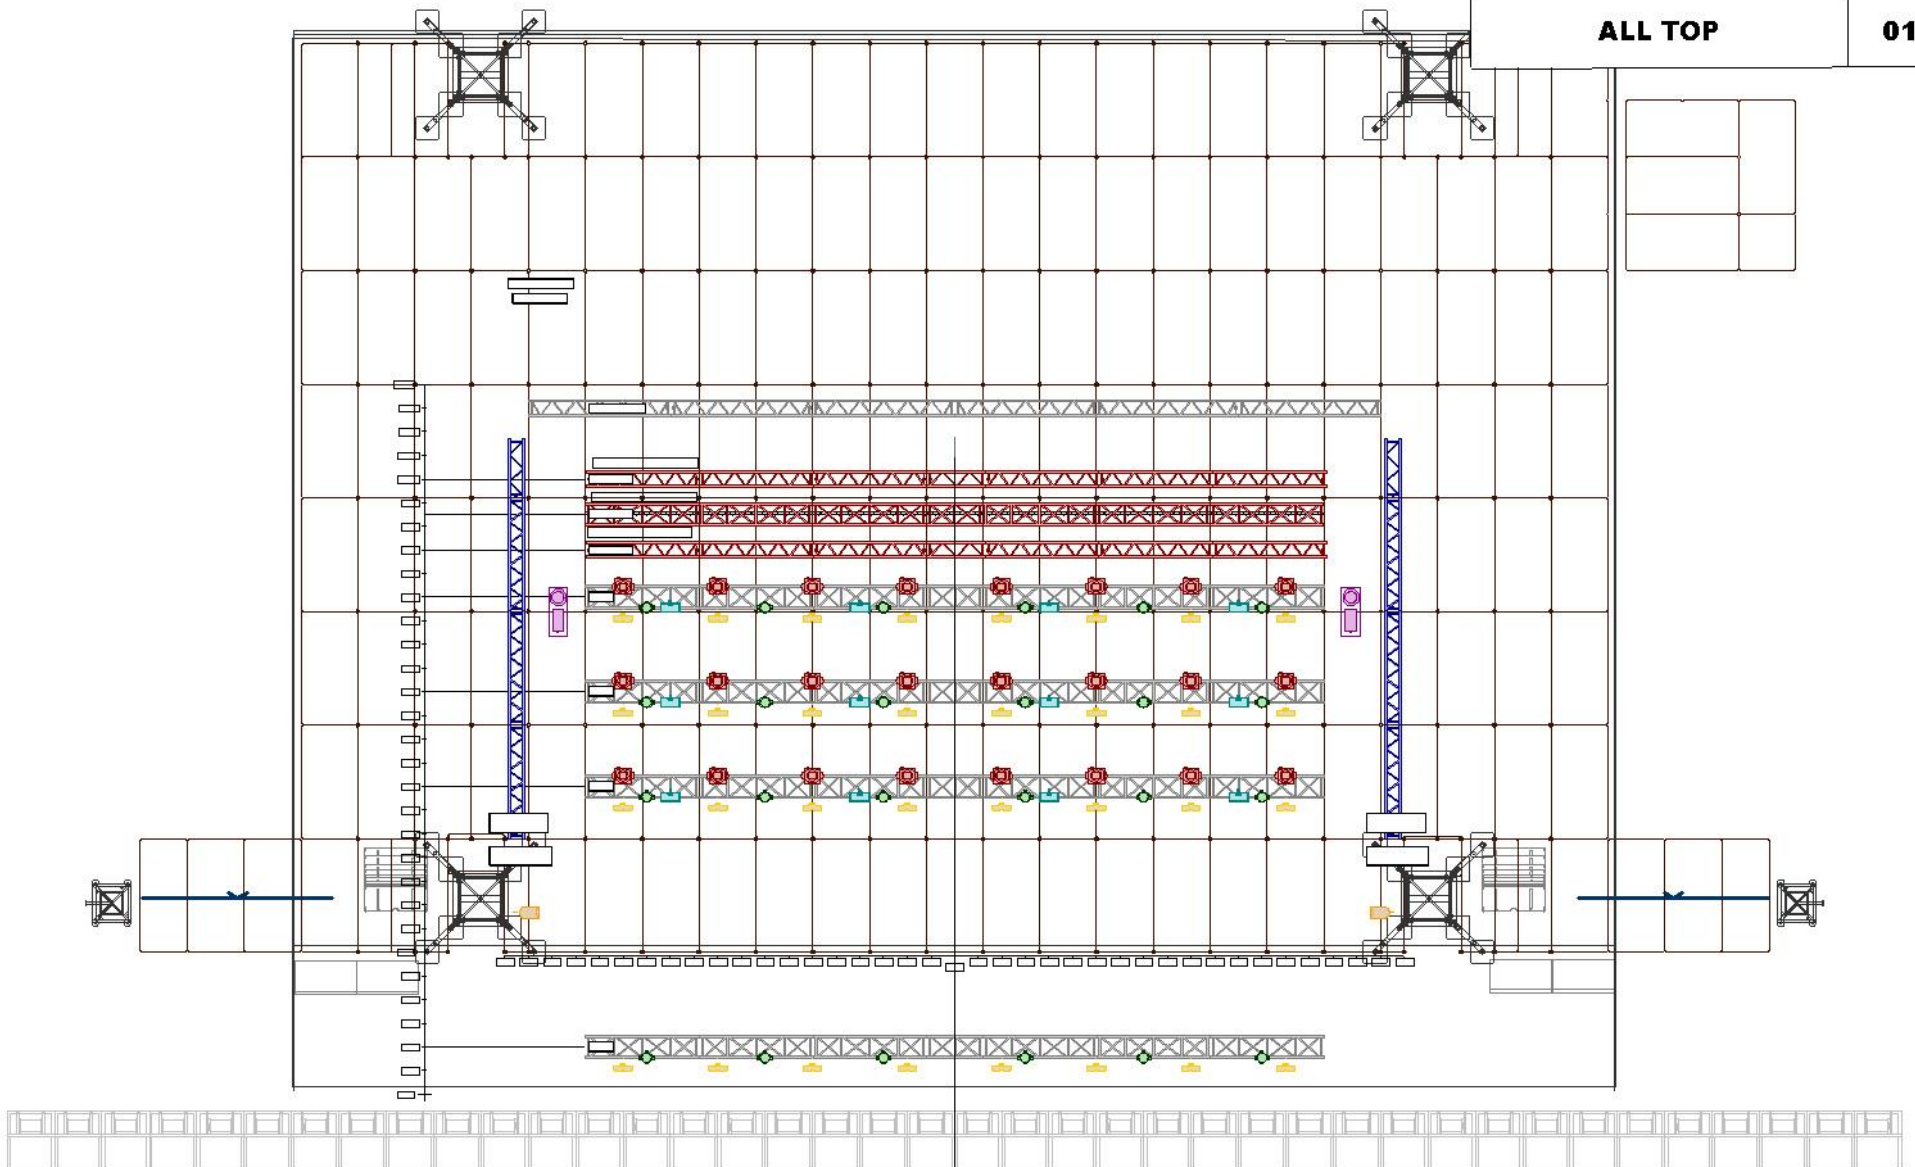

**LEGEND**

Symbol	Name	Count	Fixture Options
	MAC Aura XB	24	Mode: Std.
	MAC Viper XIP	24	Mode: Basic
	Color Strike M	18	Mode: 24 oh
	Cluster B2FC	32	Mode: 8 oh

Symbol	Name	Count	Fixture Options
	PAR 64	24	1 oh
	LOOKVIPER FAN	2	1 oh
	Viper NT	2	1 oh


**NOTES**  
 HOUSE DESK:  
 GMA2 LITE  
 3 PCS GUEST TRUSS (RED)  
 2 PCS GUEST TRUSS (BLUE)

**VENUE**  
**JELLING**  
 MANAGER - CONTACT  
 Anders Linnet  
 +4527102639  
 anli@nordic.dk

**DATE**  
 MAY 2024  
**SCALE**  
 NTS  
**VERSION**  
 V 1.2

**PROJECT**  
 MAIN STAGE  
*Jelling  
 Musikfestival*

**DESIGN**  
 Nordic Rentals

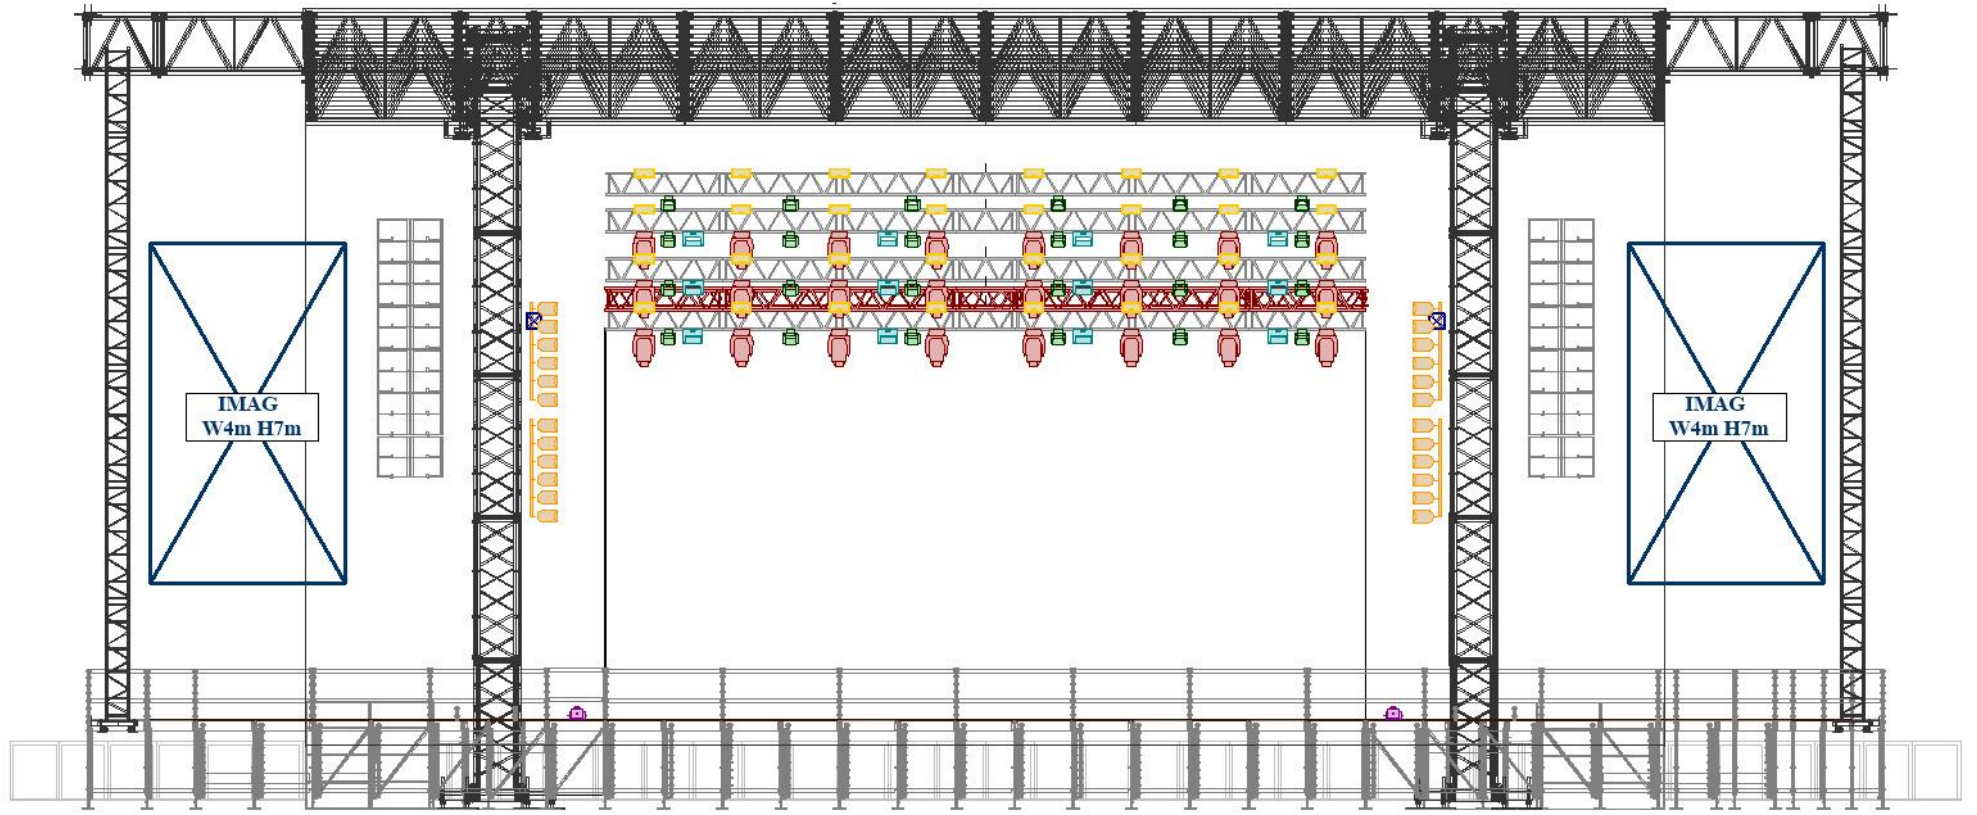

**LEGEND**

Symbol	Name	Count	Fixture Options
	MAC Aura XB	24	Mode: Std.
	MAC Viper XIP	24	Mode: Basic
	Color Strike M	18	Mode: 24 oh
	Cluster B2FC	32	Mode: 8 oh

Symbol	Name	Count	Fixture Options
	PAR 64	24	1 oh
	LOOKVIPER FAN	2	1 oh
	Viper NT	2	1 oh


**NOTES**  
 HOUSE DESK:  
 GMA2 LITE  
 3 PCS GUEST TRUSS (RED)  
 2 PCS GUEST TRUSS (BLUE)

**VENUE**  
**JELLING**  
 MANAGER - CONTACT  
 Anders Linnet  
 +4527102639  
 anli@nordic.dk

**DATE**  
 MAY 2024  
**SCALE**  
 NTS  
**VERSION**  
 V 1.2

**PROJECT**  
 MAIN STAGE

**DESIGN**  
 Nordic Rentals

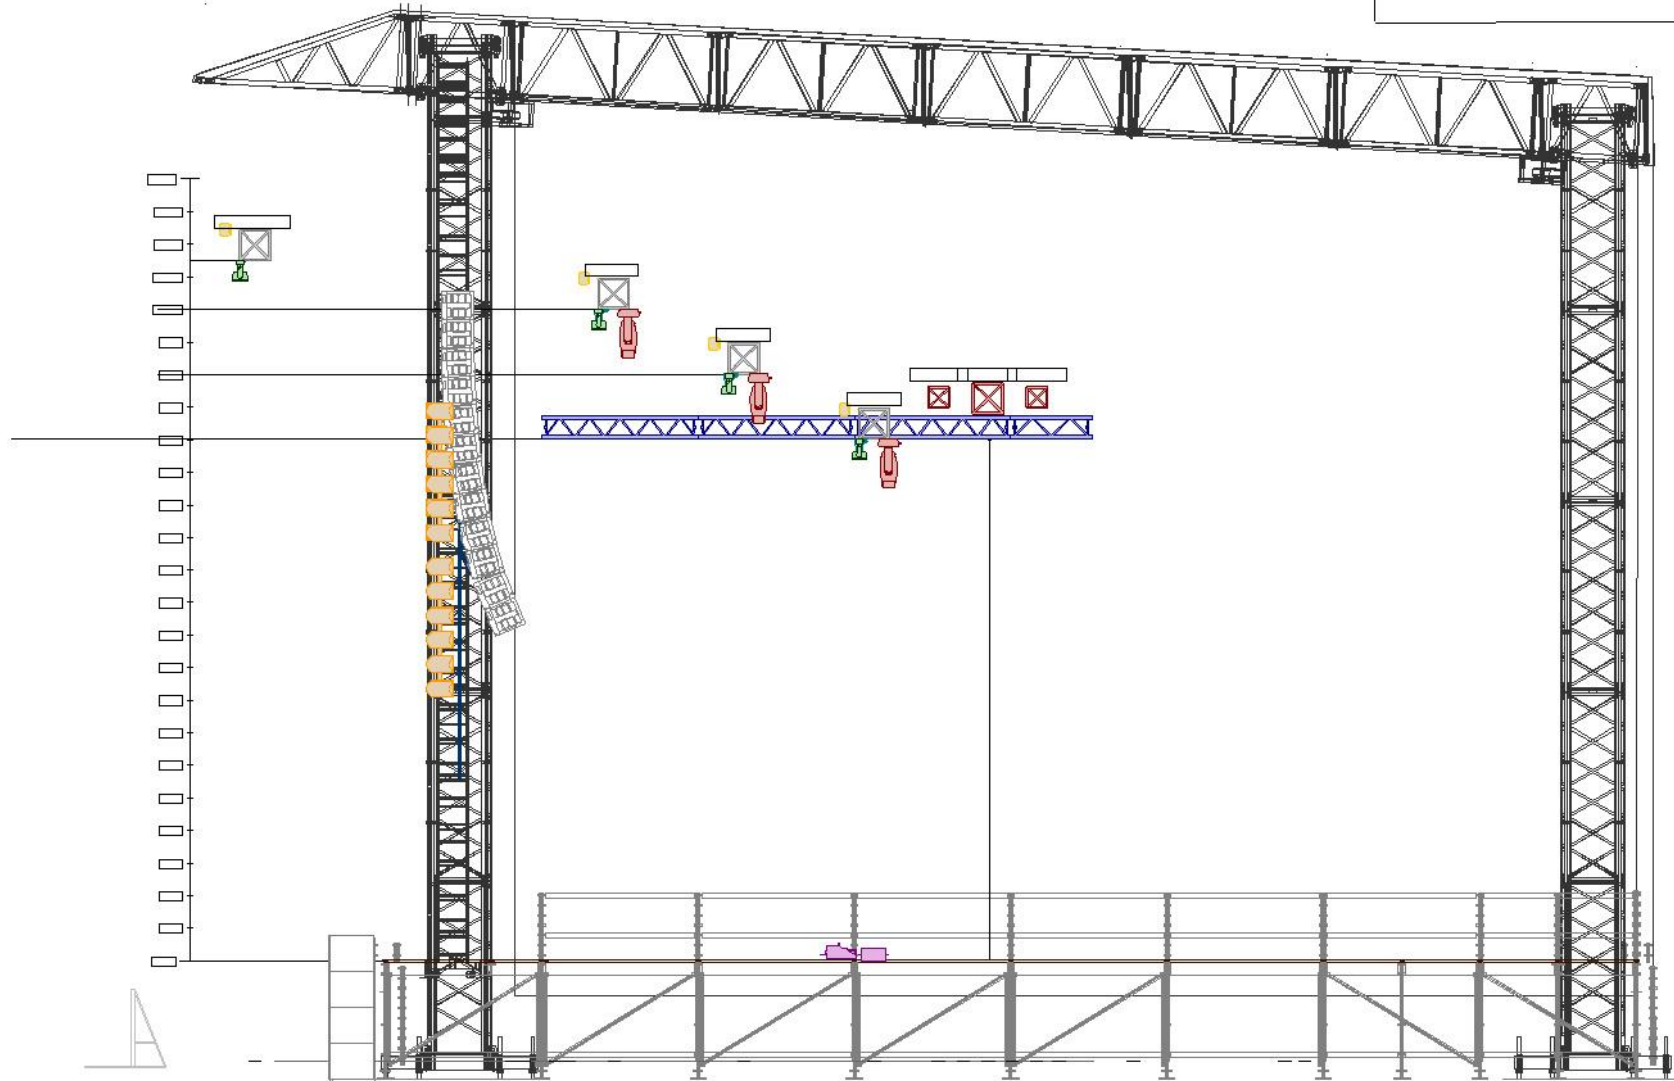

**LEGEND**

Symbol	Name	Count	Fixture Options
	MAC Aura XB	24	Mode: Std.
	MAC Viper XIP	24	Mode: Basic
	Color Strike M	18	Mode: 24 oh
	Cluster B2FC	32	Mode: 8 oh

Symbol	Name	Count	Fixture Options
	PAR 64	24	1 oh
	LOOKVIPER FAN	2	1 oh
	Viper NT	2	1 oh


**NOTES**  
 HOUSE DESK:  
 GMA2 LITE  
 3 PCS GUEST TRUSS (RED)  
 2 PCS GUEST TRUSS (BLUE)

**VENUE**  
**JELLING**  
 MANAGER - CONTACT  
 Anders Linnet  
 +4527102639  
 anli@nordic.dk

**DATE**  
 MAY 2024  
**SCALE**  
 NTS  
**VERSION**  
 V 1.2

**PROJECT**  
 MAIN STAGE  
*Jelling  
 Maskifestival*

**DESIGN**  
 Nordic Rentals

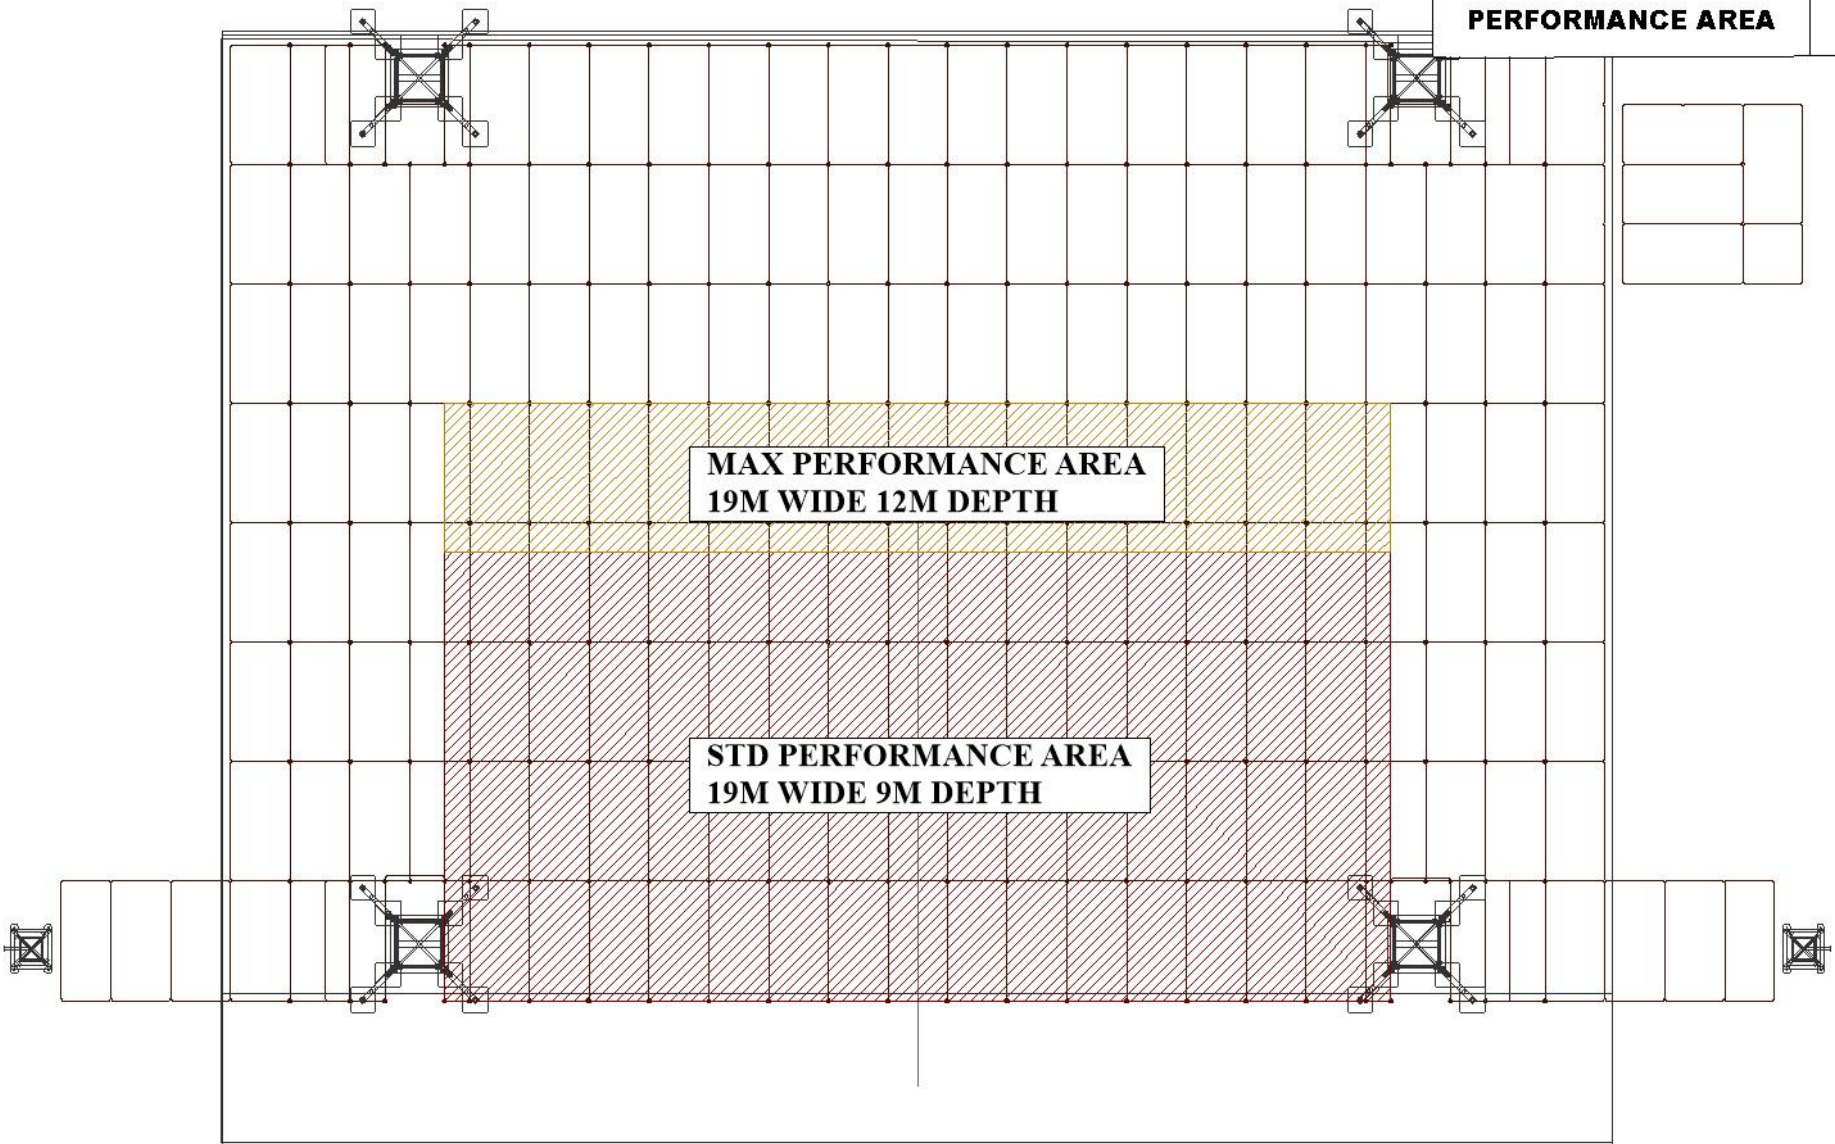

LEGEND

Symbol	Name	Count	Fixture Options
	MAC Aura XB	24	Mode: Std.
	MAC Viper XIP	24	Mode: Basic
	Color Strike M	18	Mode: 24 oh
	Cluster B2FC	32	Mode: 8 oh

Symbol	Name	Count	Fixture Options
	PAR 64	24	1 oh
	LOOKVIPER FAN	2	1 oh
	Viper NT	2	1 oh

NOTES

HOUSE DESK:  
GMA2 LITE  
3 PCS GUEST TRUSS (RED)  
2 PCS GUEST TRUSS (BLUE)

VENUE

**JELLING**  
MANAGER - CONTACT  
Anders Linnet  
+4527102639  
anli@nordic.dk

DATE

MAY 2024

SCALE

NTS

VERSION

V 1.2

PROJECT

MAIN STAGE


*Jelling  
Musikfestival*

DESIGN

Nordic Rentals





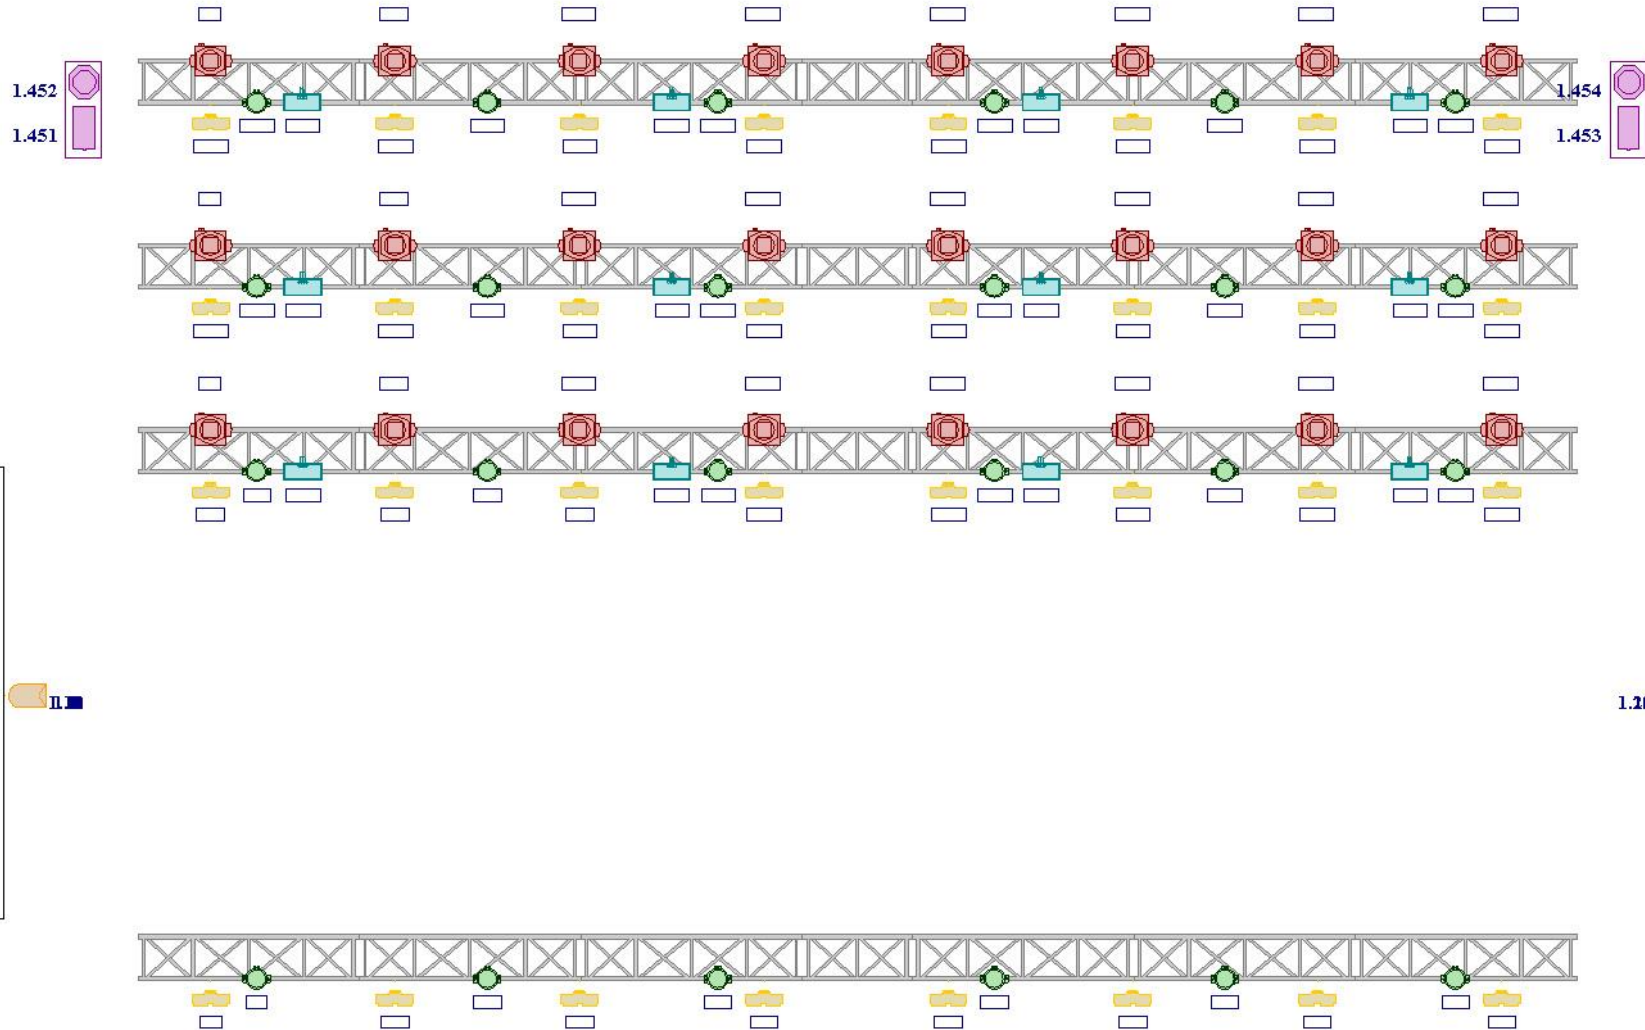

- 1.1
- 1.2
- 1.3
- 1.4
- 1.5
- 1.6
- 1.7
- 1.8
- 1.9
- 1.10
- 1.11
- 1.12

- 1.13
- 1.14
- 1.15
- 1.16
- 1.17
- 1.18
- 1.19
- 1.20
- 1.21
- 1.22
- 1.23
- 1.24

LEGEND

Symbol	Name	Count	Fixture Options
	MAC Aura XB	24	Mode: Std.
	MAC Viper XIP	24	Mode: Basic
	Color Strike M	18	Mode: 24 oh
	Cluster B2FC	32	Mode: 8 oh

Symbol	Name	Count	Fixture Options
	PAR 64	24	1 oh
	LOOKVIPER FAN	2	1 oh
	Viper NT	2	1 oh

NOTES

HOUSE DESK:  
GMA2 LITE  
3 PCS GUEST TRUSS (RED)  
2 PCS GUEST TRUSS (BLUE)

VENUE

**JELLING**  
MANAGER - CONTACT  
Anders Linnet  
+4527102639  
anli@nordic.dk

DATE

MAY 2024

SCALE

NTS

VERSION

V 1.2

PROJECT

MAIN STAGE

*Jelling  
Maskifestival*

DESIGN

Nordic Rentals



## Patch by Spot

Venue: Jelling  
Show: Mainstage

Designer: Nordic Rentals  
Version V. 1.2

Spot	Manufacturer	Type	Position	Patch	Fixture mode
1	Generic	PAR 64	SR	1.1	
2	Generic	PAR 64	SR	1.2	
3	Generic	PAR 64	SR	1.3	
4	Generic	PAR 64	SR	1.4	
5	Generic	PAR 64	SR	1.5	
6	Generic	PAR 64	SR	1.6	
7	Generic	PAR 64	SR	1.7	
8	Generic	PAR 64	SR	1.8	
9	Generic	PAR 64	SR	1.9	
10	Generic	PAR 64	SR	1.10	
11	Generic	PAR 64	SR	1.11	
12	Generic	PAR 64	SR	1.12	
13	Generic	PAR 64	SL	1.13	
14	Generic	PAR 64	SL	1.14	
15	Generic	PAR 64	SL	1.15	
16	Generic	PAR 64	SL	1.16	
17	Generic	PAR 64	SL	1.17	
18	Generic	PAR 64	SL	1.18	
19	Generic	PAR 64	SL	1.19	
20	Generic	PAR 64	SL	1.20	
21	Generic	PAR 64	SL	1.21	
22	Generic	PAR 64	SL	1.22	
24	Generic	PAR 64	SL	1.23	
24	Generic	PAR 64	SL	1.24	
101	Roox	Cluster B2FC	LX1 - FRONT	2.1	Mode: 9 hc
102	Roox	Cluster B2FC	LX1 - FRONT	2.10	Mode: 9 hc
103	Roox	Cluster B2FC	LX1 - FRONT	2.19	Mode: 9 hc
104	Roox	Cluster B2FC	LX1 - FRONT	2.28	Mode: 9 hc
105	Roox	Cluster B2FC	LX1 - FRONT	2.37	Mode: 9 hc
106	Roox	Cluster B2FC	LX1 - FRONT	2.46	Mode: 9 hc
107	Roox	Cluster B2FC	LX1 - FRONT	2.55	Mode: 9 hc
108	Roox	Cluster B2FC	LX1 - FRONT	2.64	Mode: 9 hc
109	Roox	Cluster B2FC	LX2 - MS	2.73	Mode: 9 hc
110	Roox	Cluster B2FC	LX2 - MS	2.82	Mode: 9 hc
111	Roox	Cluster B2FC	LX2 - MS	2.91	Mode: 9 hc
112	Roox	Cluster B2FC	LX2 - MS	2.100	Mode: 9 hc
113	Roox	Cluster B2FC	LX2 - MS	2.109	Mode: 9 hc
114	Roox	Cluster B2FC	LX2 - MS	2.118	Mode: 9 hc
115	Roox	Cluster B2FC	LX2 - MS	2.127	Mode: 9 hc
116	Roox	Cluster B2FC	LX2 - MS	2.136	Mode: 9 hc
117	Roox	Cluster B2FC	LX3 - MS	2.145	Mode: 9 hc
118	Roox	Cluster B2FC	LX3 - MS	2.154	Mode: 9 hc
119	Roox	Cluster B2FC	LX3 - MS	2.163	Mode: 9 hc
120	Roox	Cluster B2FC	LX3 - MS	2.172	Mode: 9 hc
121	Roox	Cluster B2FC	LX3 - MS	2.181	Mode: 9 hc
122	Roox	Cluster B2FC	LX3 - MS	2.190	Mode: 9 hc
123	Roox	Cluster B2FC	LX3 - MS	2.199	Mode: 9 hc
124	Roox	Cluster B2FC	LX3 - MS	2.208	Mode: 9 hc
125	Roox	Cluster B2FC	LX4 - MS	2.217	Mode: 9 hc
126	Roox	Cluster B2FC	LX4 - MS	2.226	Mode: 9 hc
127	Roox	Cluster B2FC	LX4 - MS	2.235	Mode: 9 hc
128	Roox	Cluster B2FC	LX4 - MS	2.244	Mode: 9 hc
129	Roox	Cluster B2FC	LX4 - MS	2.253	Mode: 9 hc
130	Roox	Cluster B2FC	LX4 - MS	2.262	Mode: 9 hc
131	Roox	Cluster B2FC	LX4 - MS	2.271	Mode: 9 hc
132	Roox	Cluster B2FC	LX4 - MS	2.280	Mode: 9 hc
201	Look Solutions	Look Viper	Floor	1.451	2 ch. smoke / fan
202	Look Solutions	Look Viper	Floor	1.453	2 ch. smoke / fan
301	Martin	Mac Aura XB	LX1 - FRONT	3.1	Mode: Std. 14 ch.

## Patch by Spot

Venue: Jelling  
Show: Mainstage

Designer: Nordic Rentals  
Version V. 1.2

Spot	Manufacturer	Type	Position	Patch	Fixture mode
302	Martin	Mac Aura XB	LX1 - FRONT	3.15	Mode: Std. 14 ch.
303	Martin	Mac Aura XB	LX1 - FRONT	3.29	Mode: Std. 14 ch.
304	Martin	Mac Aura XB	LX1 - FRONT	3.43	Mode: Std. 14 ch.
305	Martin	Mac Aura XB	LX1 - FRONT	3.57	Mode: Std. 14 ch.
306	Martin	Mac Aura XB	LX1 - FRONT	3.71	Mode: Std. 14 ch.
307	Martin	Mac Aura XB	LX2 - MS	3.85	Mode: Std. 14 ch.
308	Martin	Mac Aura XB	LX2 - MS	3.99	Mode: Std. 14 ch.
309	Martin	Mac Aura XB	LX2 - MS	3.113	Mode: Std. 14 ch.
310	Martin	Mac Aura XB	LX2 - MS	3.127	Mode: Std. 14 ch.
311	Martin	Mac Aura XB	LX2 - MS	3.141	Mode: Std. 14 ch.
312	Martin	Mac Aura XB	LX2 - MS	3.155	Mode: Std. 14 ch.
313	Martin	Mac Aura XB	LX3 - MS	3.169	Mode: Std. 14 ch.
314	Martin	Mac Aura XB	LX3 - MS	3.183	Mode: Std. 14 ch.
315	Martin	Mac Aura XB	LX3 - MS	3.197	Mode: Std. 14 ch.
316	Martin	Mac Aura XB	LX3 - MS	3.211	Mode: Std. 14 ch.
317	Martin	Mac Aura XB	LX3 - MS	3.225	Mode: Std. 14 ch.
318	Martin	Mac Aura XB	LX3 - MS	3.239	Mode: Std. 14 ch.
319	Martin	Mac Aura XB	LX4 - MS	3.253	Mode: Std. 14 ch.
320	Martin	Mac Aura XB	LX4 - MS	3.267	Mode: Std. 14 ch.
321	Martin	Mac Aura XB	LX4 - MS	3.281	Mode: Std. 14 ch.
322	Martin	Mac Aura XB	LX4 - MS	3.295	Mode: Std. 14 ch.
323	Martin	Mac Aura XB	LX4 - MS	3.309	Mode: Std. 14 ch.
324	Martin	Mac Aura XB	LX4 - MS	3.323	Mode: Std. 14 ch.
701	Martin	Mac Viper XIP	LX2 - MS	4.1	Mode: Basic 54 ch.
702	Martin	Mac Viper XIP	LX2 - MS	4.55	Mode: Basic 54 ch.
703	Martin	Mac Viper XIP	LX2 - MS	4.109	Mode: Basic 54 ch.
704	Martin	Mac Viper XIP	LX2 - MS	4.163	Mode: Basic 54 ch.
705	Martin	Mac Viper XIP	LX2 - MS	4.217	Mode: Basic 54 ch.
706	Martin	Mac Viper XIP	LX2 - MS	4.271	Mode: Basic 54 ch.
707	Martin	Mac Viper XIP	LX2 - MS	4.325	Mode: Basic 54 ch.
708	Martin	Mac Viper XIP	LX2 - MS	4.379	Mode: Basic 54 ch.
709	Martin	Mac Viper XIP	LX3 - MS	5.1	Mode: Basic 54 ch.
710	Martin	Mac Viper XIP	LX3 - MS	5.55	Mode: Basic 54 ch.
711	Martin	Mac Viper XIP	LX3 - MS	5.109	Mode: Basic 54 ch.
712	Martin	Mac Viper XIP	LX3 - MS	5.163	Mode: Basic 54 ch.
713	Martin	Mac Viper XIP	LX3 - MS	5.217	Mode: Basic 54 ch.
714	Martin	Mac Viper XIP	LX3 - MS	5.271	Mode: Basic 54 ch.
715	Martin	Mac Viper XIP	LX3 - MS	5.325	Mode: Basic 54 ch.
716	Martin	Mac Viper XIP	LX3 - MS	5.379	Mode: Basic 54 ch.
717	Martin	Mac Viper XIP	LX4 - MS	6.1	Mode: Basic 54 ch.
718	Martin	Mac Viper XIP	LX4 - MS	6.55	Mode: Basic 54 ch.
719	Martin	Mac Viper XIP	LX4 - MS	6.109	Mode: Basic 54 ch.
720	Martin	Mac Viper XIP	LX4 - MS	6.163	Mode: Basic 54 ch.
721	Martin	Mac Viper XIP	LX4 - MS	6.217	Mode: Basic 54 ch.
722	Martin	Mac Viper XIP	LX4 - MS	6.271	Mode: Basic 54 ch.
723	Martin	Mac Viper XIP	LX4 - MS	6.325	Mode: Basic 54 ch.
724	Martin	Mac Viper XIP	LX4 - MS	6.379	Mode: Basic 54 ch.
901	Chauvet	Color strike M	LX2 - MS	1.101	Mode: 24 ch
902	Chauvet	Color strike M	LX2 - MS	1.125	Mode: 24 ch
903	Chauvet	Color strike M	LX2 - MS	1.149	Mode: 24 ch
904	Chauvet	Color strike M	LX2 - MS	1.173	Mode: 24 ch
905	Chauvet	Color strike M	LX3 - MS	1.197	Mode: 24 ch
906	Chauvet	Color strike M	LX3 - MS	1.221	Mode: 24 ch
907	Chauvet	Color strike M	LX3 - MS	1.245	Mode: 24 ch
908	Chauvet	Color strike M	LX3 - MS	1.269	Mode: 24 ch
909	Chauvet	Color strike M	LX4 - MS	1.293	Mode: 24 ch
910	Chauvet	Color strike M	LX4 - MS	1.317	Mode: 24 ch
911	Chauvet	Color strike M	LX4 - MS	1.341	Mode: 24 ch
912	Chauvet	Color strike M	LX4 - MS	1.365	Mode: 24 ch